



# Outdoor Living Kits

## Assembly Instructions — Fireplace

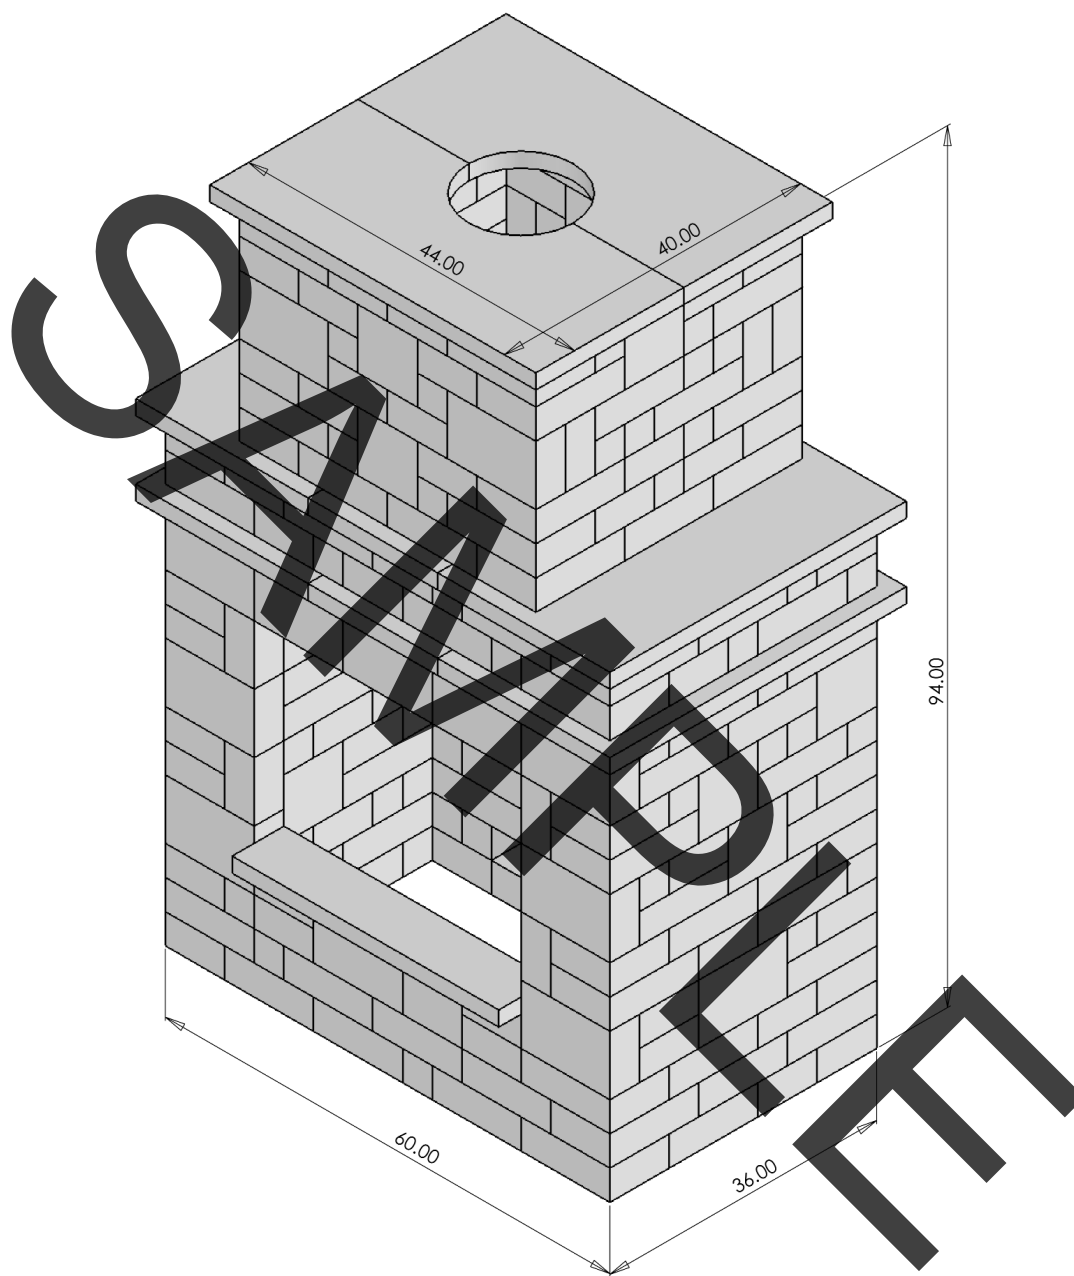

Appearance  
Dependability  
Efficiency

**ROCKWOOD**<sup>®</sup>  
RETAINING WALLS  
*A better way.<sup>™</sup>*

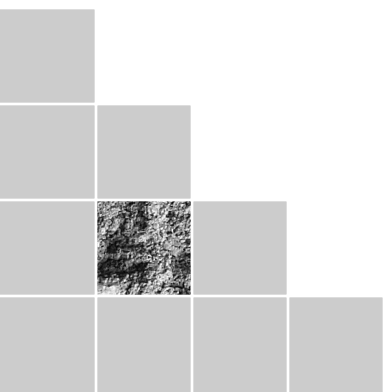


**Base Preparation:** Base can be constructed of either poured slab or compacted gravel. See requirements below.

**Zoning and Permits:** Before you plan your project, learn about the necessary zoning requirements and rules for excavating and building in your area. No matter how small your project, be sure you obtain the necessary permits before you start construction.

**Know What's Below:** Whether you are planning to do it yourself or hire a professional, smart digging means calling 811 before each job. Homeowners often make risky assumptions about whether or not they should get their utility lines marked, but every digging job requires a call – even small projects like planting trees and shrubs.



**Know what's below.  
Call before you dig.**

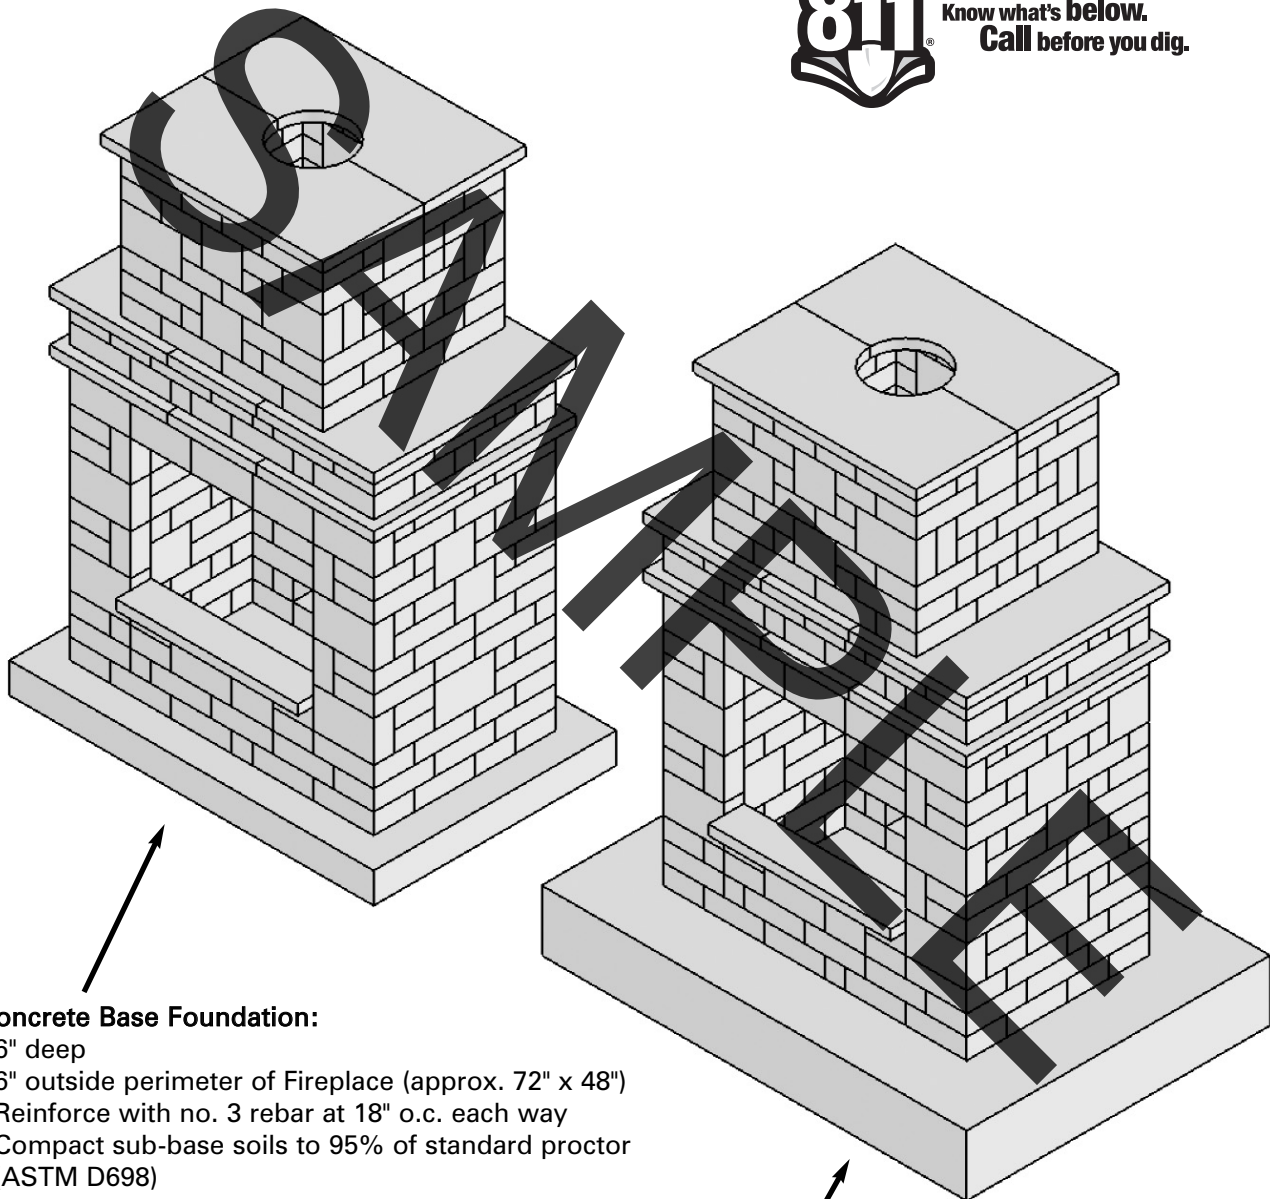


**Concrete Base Foundation:**

- 6" deep
- 6" outside perimeter of Fireplace (approx. 72" x 48")
- Reinforce with no. 3 rebar at 18" o.c. each way
- Compact sub-base soils to 95% of standard proctor (ASTM D698)


**Aggregate Base Foundation:**

- 12" deep (minimum)
- 12" outside perimeter of fireplace (approx. 84" x 60")
- Compact sub-base soils to 95% of standard proctor
- Compact aggregate base to 95% of standard proctor (ASTM D698)

## Course 1

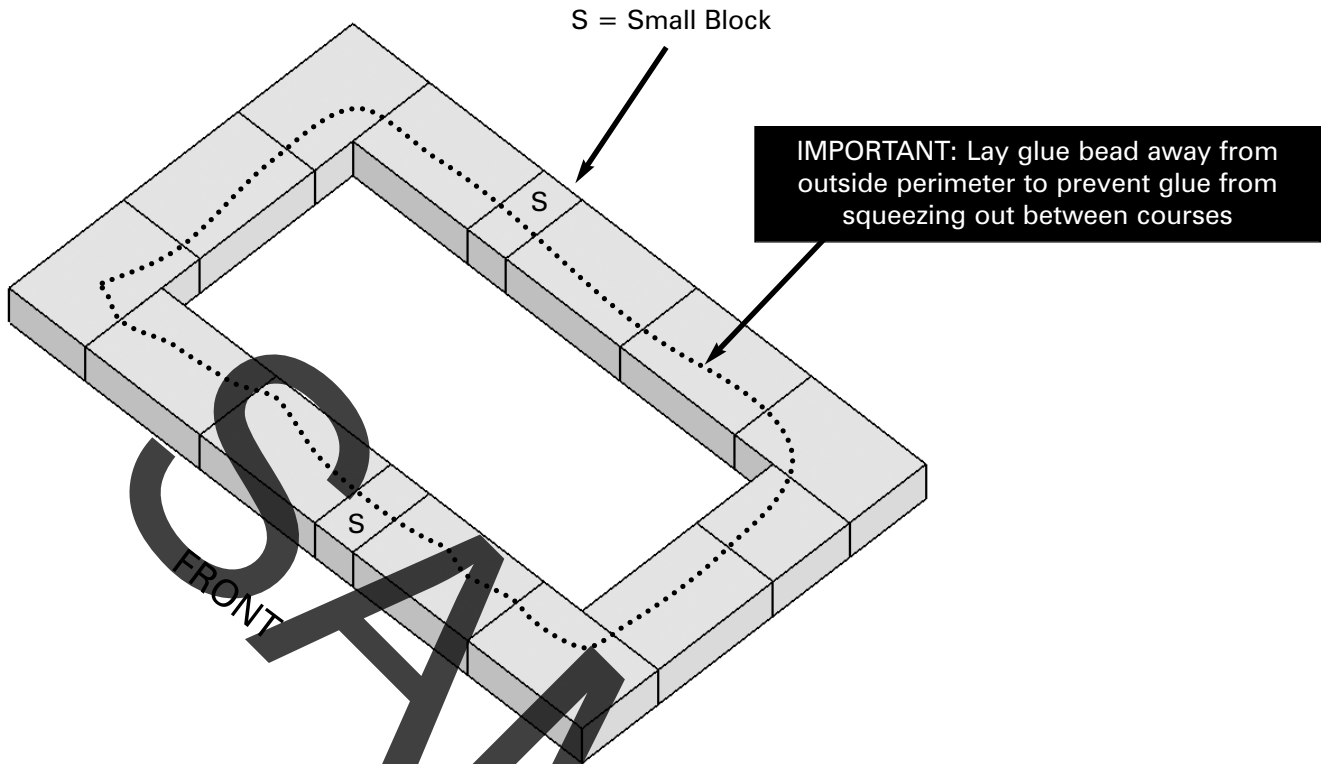


## Course 2

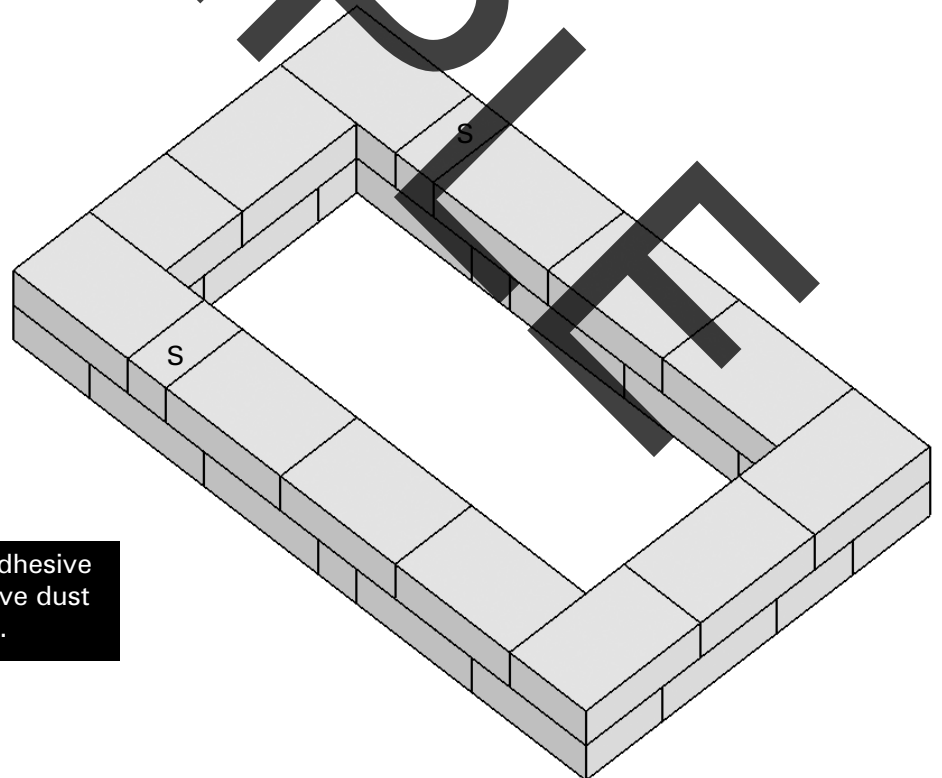

IMPORTANT: Use Super-Stik adhesive on each course. Brush excessive dust from blocks to be glued.

**Course 25** (Final step)

Place and center Silver Creek  
44 x 20" tops as shown. Lift to glue in place.

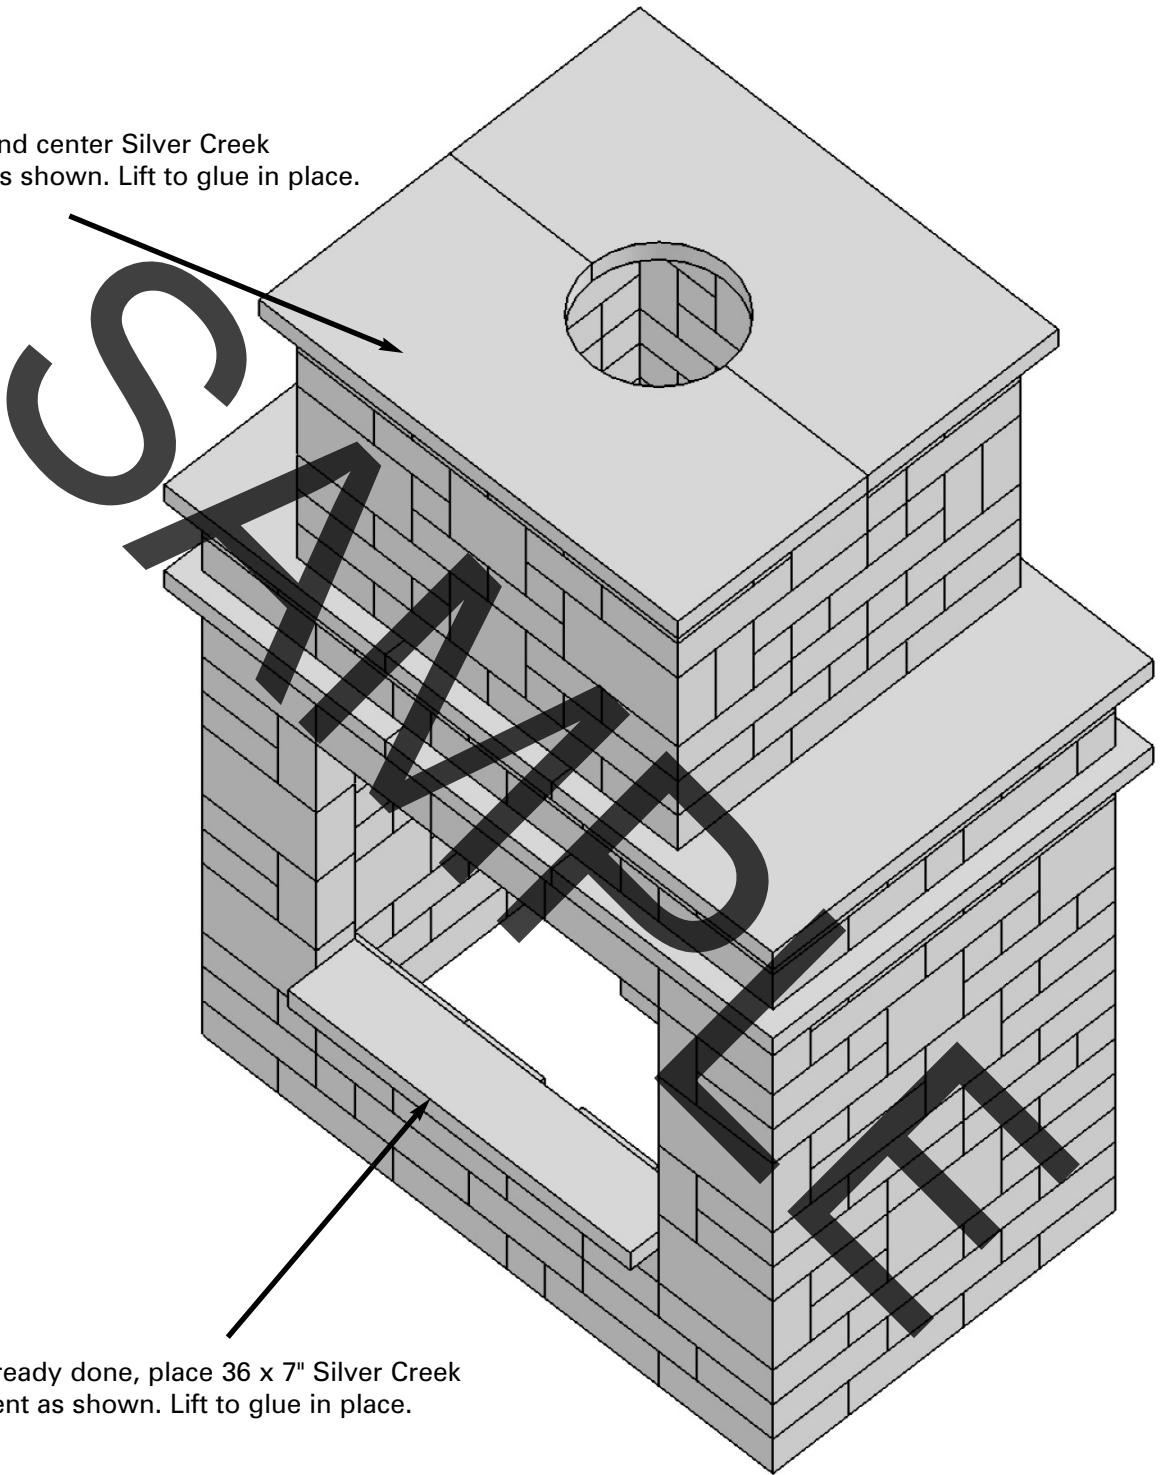

If not already done, place 36 x 7" Silver Creek  
accent as shown. Lift to glue in place.